TECHNICAL DATA SHEET

PROTECTION BOARD 600

Heavy duty protection board

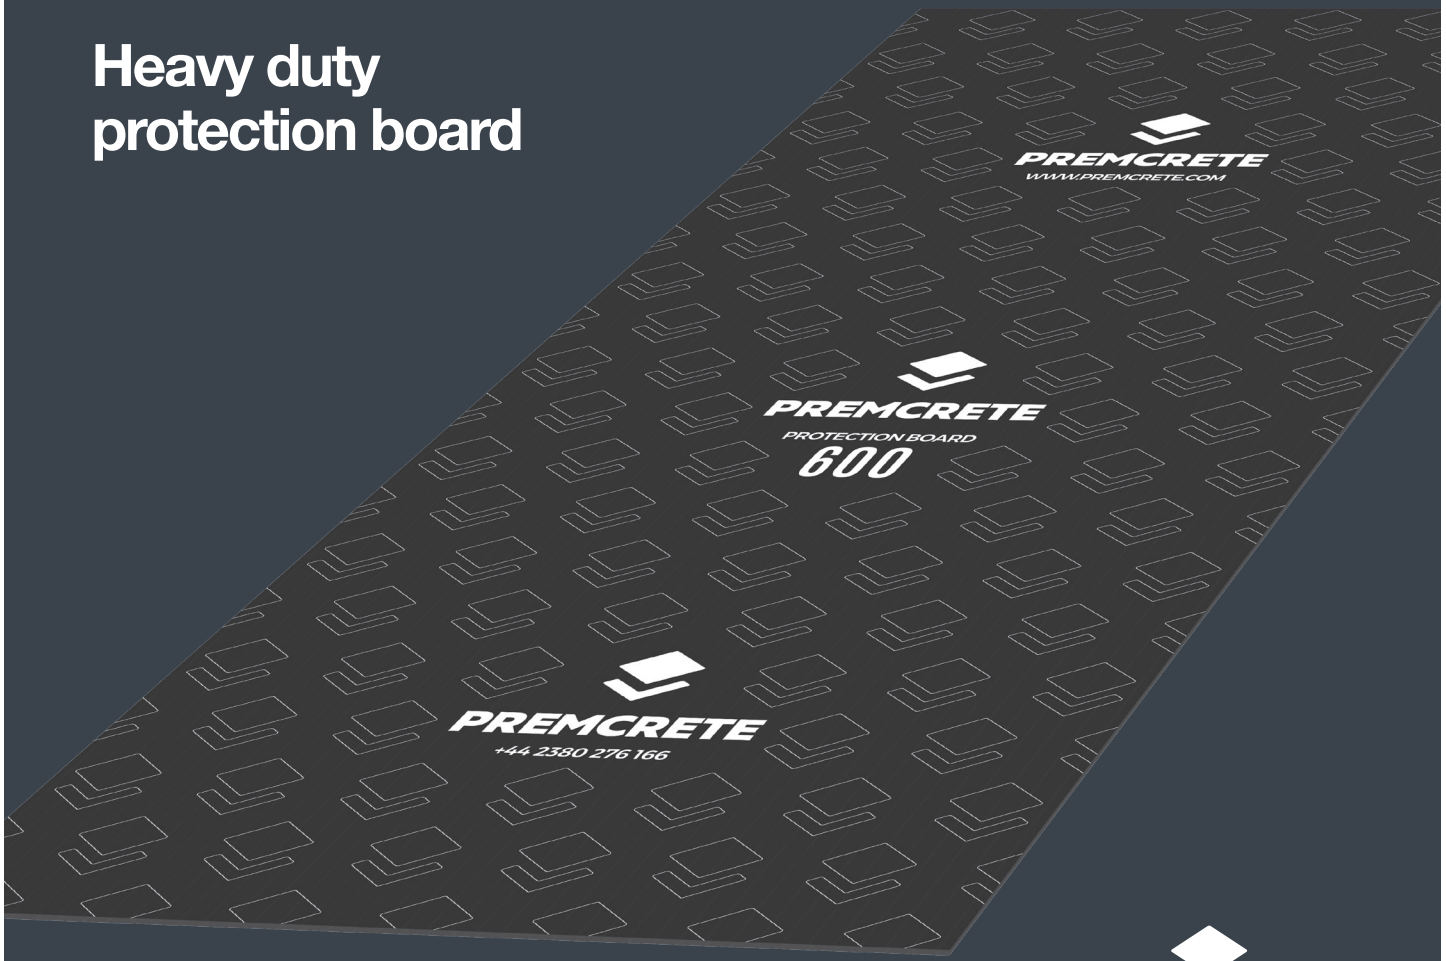

PREMCRETE

PROTECTION BOARD 600

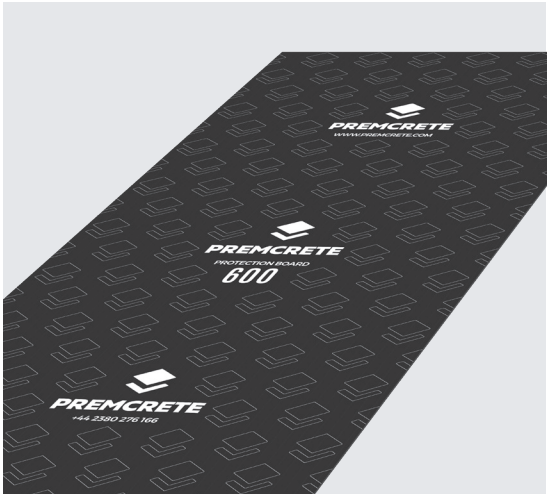



DESCRIPTION

PROTECTION BOARD 600 is a tough bituminous polyester reinforced protection board designed to protect PREMCRETE waterproof and gas resistant membranes from puncture and damage. It is a particularly robust board which will not puncture even in extreme conditions.

USES

PROTECTION BOARD 600 should be installed against the waterproof or gas resistant membrane prior to backfilling. The boards should be adhered to the installed membrane using PREMCRETE DOUBLE SIDED TAPE. It can be easily cut and shaped to provide impact resistance for most substrates.

ADVANTAGES

- Weather and rot proof
- Tough yet flexible sheet
- Excellent puncture resistance

TECHNICAL & PERFORMANCE PROPERTIES

Properties	Test Method	Value
Length	N/A	2m
Width	N/A	1m
Thickness	N/A	3mm

INSTALLATION PROCEDURE

Application

Where PROTECTION BOARD 600 is to be used for the protection of vertically applied membranes then PREMCRETE DOUBLE SIDED TAPE should be used to adhere the PROTECTION BOARD 600 to the installed waterproof membrane. Lap joints should be taped with suitable high adhesion tape to prevent displacement during backfill. For installation to horizontally applied membranes then the boards should be laid on to the membrane and the joints should be taped with suitable high adhesion tape to prevent displacement during concrete pour.

PROTECTION BOARD 600

PACKAGING & COVERAGE

Pack Size

1m x 2m sheet.

Coverage

One sheet will cover $2m^{2.}$

STORAGE & SHELF LIFE

PROTECTION BOARD 600 should be stored away from direct sunlight, in clean conditions, when stored in correct conditions the product will have a shelf life in excess of 12 months.

HEALTH & SAFETY

See separate Material Safety Data Sheet.



44 Macadam Way | West Portway | Andover | Hampshire | SP10 3XW
www.premcrete.com | 02380 276166 | sales@premcrete.com

PREMCRETE